

Project	-
ltem No.	

Model No Quantity

CSI No. 114000

# COUNTER HEIGHT FREEZER - ONE SECTIO



CHF-30-1S-D-FM 48" Overall Width, One Door (shown with optional stainless steel flat top)

## **MODEL GUIDE**

Model Number		Description	
	CHF-30-1S-D-EM	48" Overall Width, One Door	
Options	Model Number Modification		
	Remote Refrigeration	Delete suffix "EM" from model number	
	Pass-Thru	Add prefix "PT" to model number	
	Narrow Depth	Change "D" to "N"	



### **STANDARD FEATURES:**

#### **Construction/Cabinet**

- · Exterior front and sides heavy gauge stainless steel
- Exterior back and bottom heavy gauge galvanized
- Stainless steel compressor housing
- Stainless steel front, door, end mount, and interior
- Heavy-duty 6" adjustable stainless steel legs
- Cabinet body is foamed-in-place minimum 2-1/2" polyurethane insulation
- Fully coved interior with welded radius corners for easy cleaning
- Optional drawers hold two 12" x 20" pans or fractional pans (pans by others)
- Rugged drawer construction
- Welded stainless steel door handle or drawer pull
- Compressor housing located on left side (optional on right side)
- Stainless steel shelf clips and shelf standards
- One adjustable chrome plated wire shelf per section •

#### Doors

- Self-closing door hinges with stay-open feature at 120°
- Standard right hinged door (other configurations available)
- Energy saving condensate heater around door opening •
- Snap-in magnetic door gasket
- Impact-resistant PVC breaker strip

#### **Refrigeration Package**

- Slideout condensing unit enables fast and easy service
- Expansion valve refrigeration system for superior recovery and temperature pulldown
- Low pressure control prevents compressor burnout in case of refrigerant loss
- R-449a, low GWP refrigerant for superior temperature recovery and pulldown .
- Hot gas condensate evaporatorquickly dissipates condensation using zero additional energy
- Receiver tank and service valves allows reuse of refrigerant and enables rapid pulldown during times of peak demand
- Integrated sight glass allows technicians to easily detect leaks or moisture without tools

#### **Control Systems & Warranty Coverage**

- Digital temperature control easily adjust setpoint between -5 to 5°F
- Master power switch
- One 9 foot electrical cord
- Warranty: 5 year compressor, 5 year parts, 1 year labor


### **OPTIONS & ACCESSORIES:**

- □ Stainless steel top (specify flat or marine edge type)
- □ Stainless steel back \_\_\_\_ bottom\_\_\_\_ (specify either or both)
- Additional chrome wire shelves (specify quantity)
- Stainless steel wire shelves in lieu of chrome shelves
- □ Tray slides (specify quantity)
  - "L" Type \_\_\_\_ Universal slides \_\_\_\_ "R" Type \_
- Digital temperature control & solenoid for remote models
- Refrigerant options for remote models-please specify refrigerant type
- Stainless steel curb base (specify 4" or 6" high)
- Temperature alarm
- 6" front locking casters in lieu of legs (no charge)
- □ 6" seismic legs
- □ 5" front locking casters
- □ 4" front locking casters
- 2 drawers in lieu of door (std depth only)
- □ Correctional facilities package
- □ Water-cooled condensing unit
- □ Interior LED lighting
- $\Box$ Marine secure latch
- ADA Height stainless steel sub top changes overall height to 31.5" (requires 4" high casters)

UTILITY REFRIGERATOR • 12160 Sherman Way • North Hollywood CA 91605 • 818-764-6200 • Fax: 818-764-6211 • www.utilityrefrigerator.com ©/™/® Utility Refrigerator UR-CHF1 | MU



## COUNTER HEIGHT FREEZER - ONE SECTION

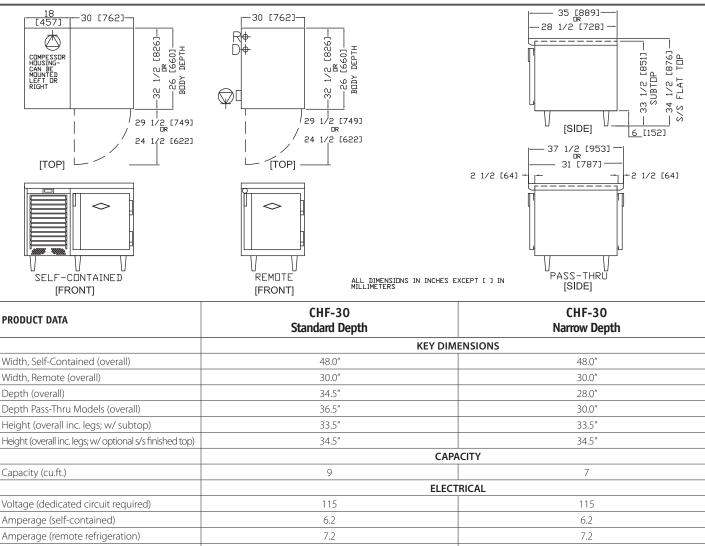

Amperage (remote refrigeration)	7.2	7.2	
BTU requirement*, remote	1195	1104	
NEMA Plug Configuration (self-contained only)	5-15P	5-15P	
Horsepower (self-contained)	1/3	1/3	
	SHIPPING		
Ship Weight, Self-Contained (lbs.)	430	400	
Ship Weight, Remote (Ibs.)	300	270	
Ship Volume, Self-Contained (cu. ft.)	59	51	
Ship Volume, Remote (cu. ft.)	39	34	
Crated Dimensions, Self-Contained (39" H)	54" W x 48" D	54" W x 42" D	
Crated Dimensions, Remote (39" H)	36" W x 48" D	36" W x 42" D	

\*90°F ambient, -15°F evaporator, 20' max. line length.

#### Data is for standard models: options may change specifications.

#### UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605 Telephone: (818) 764-6200 • Fax: (818) 764-6211 www.utilityrefrigerator.com

DUE TO CONTINUOUS PRODUCT IMPROVEMENTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

