

Project	
tem No.	
Model No.	
Quantity _	

COUNTER HEIGHT FREEZER - TWO SECTION



MODEL GUIDE

Model Number		Description
	CHF-50-2S-D-EM	68" Overall Width, Two Doors
	CHF-60-2S-D-EM	78" Overall Width, Two Doors
Options		Model Number Modification
	Remote Refrigeration	Delete suffix "EM" from model number
	Pass-Thru	Add prefix "PT" to model number
	Narrow Depth	Change "D" to "N"

AGENCY APPROVALS:





Intertek

STANDARD FEATURES:

Construction/Cabinet

- · Exterior front and sides heavy gauge stainless steel
- Exterior back and bottom heavy gauge galvanized
- Stainless steel compressor housing
- Stainless steel front, door, end mount, and interior
- Heavy-duty 6" adjustable stainless steel legs
- Cabinet body is foamed-in-place minimum 2-1/2" polyurethane insulation
- Fully coved interior with welded radius corners for easy cleaning
- Optional drawers hold two 12"x 20" pans or fractional pans (pans by others)
- Rugged drawer construction
- Welded stainless steel door handle or drawer pull
- Compressor housing located on left side (optional on right side)
- Stainless steel shelf clips and shelf standards
- One adjustable chrome plated wire shelf per section

- Self-closing door hinges with stay-open feature at 120°
- Standard left door hinged left, right door hinged right (other configurations available)
- Energy saving condensate heater around door opening
- · Snap-in magnetic door gasket
- Impact-resistant PVC breaker strip

Refrigeration Package

- Slideout condensing unit enables fast and easy service
- Expansion valve refrigeration system for superior recovery and temperature pulldown
- Low pressure control prevents compressor burnout in case of refrigerant loss
- R-449a, low GWP refrigerant for superior temperature recovery and pulldown
- Hot gas condensate evaporatorquickly dissipates condensation using zero additional energy
- Receiver tank and service valves allows reuse of refrigerant and enables rapid pulldown during times of peak demand
- Integrated sight glass allows technicians to easily detect leaks or moisture without tools

Control Systems & Warranty Coverage

- Digital temperature control easily adjust setpoint between -5 to 5°F
- Master power switch
- One 9 foot electrical cord
- Warranty: 5 year compressor, 5 year parts, 1 year labor

OPTIONS & ACCESSORIES:

Stainless steel top (specify flat or marine edge type)
Stainless steel back bottom (specify either or both)
Additional chrome wire shelves (specify quantity)
Stainless steel wire shelves in lieu of chrome shelves
Tray slides (specify quantity)
"L" Type Universal slides "R" Type
Digital temperature control & solenoid for remote models
Refrigerant options for remote models-please specify refrigerant type
Stainless steel curb base (specify 4" or 6" high)
Temperature alarm
6" front locking casters in lieu of legs (no charge)
6" seismic legs
5" front locking casters
4" front locking casters
2 drawers in lieu of door (std depth only)
Correctional facilities package

☐ Water-cooled condensing unit


☐ Interior LED lighting

☐ Marine secure latch

☐ ADA Height – stainless steel sub top changes overall height to 31.5" (requires 4" high casters)



COUNTER HEIGHT FREEZER - TWO SECTION

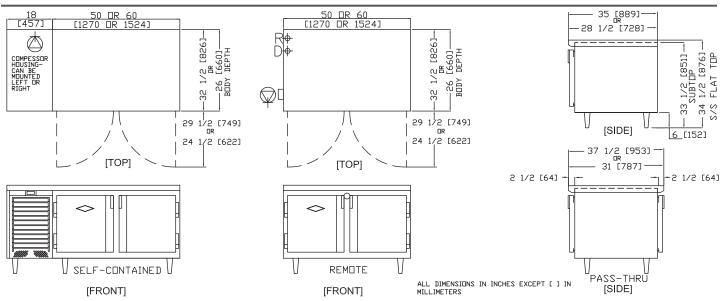

PRODUCT DATA	CHF-50 Standard Depth	CHF-50 Narrow Depth	CHF-60 Standard Depth	CHF-60 Narrow Depth	
	KEY DIMENSIONS				
Width, Self-Contained (overall)	68.0"	68.0"	78.0"	78.0"	
Width, Remote (overall)	50.0"	50.0"	60.0"	60.0"	
Depth (overall)	34.5"	28.0"	34.5"	28.0"	
Depth Pass-Thru Models (overall)	36.5"	30.0"	36.5"	30.0"	
Height (overall inc. legs; w/ subtop)	33.5"	33.5"	33.5"	33.5"	
Height (overall inc. legs; w/ optional s/s finished top)	34.5"	34.5"	34.5"	34.5"	
	CAPACITY				
Capacity (cu.ft.)	16	12	19	15	
	ELECTRICAL				
Voltage (dedicated circuit required)	115	115	115	115	
Amperage (self-contained)	7.6	7.6	8.6	8.6	
Amperage (remote refrigeration)	7.5	7.5	8.8	8.8	
BTU requirement*, remote	1640	1543	2132	2039	
NEMA Plug Configuration (self-contained only)	5-15P	5-15P	5-15P	5-15P	
Horsepower (self-contained)	1/2	1/2	1/2	1/2	
	SHIPPING				
ShipWeight, Self-Contained (lbs.)	550	500	610	560	
ShipWeight, Remote (lbs.)	320	300	400	380	
Ship Volume, Self-Contained (cu. ft.)	80	70	91	80	
Ship Volume, Remote (cu. ft.)	61	53	72	63	
CratedDimensions, Self-Contained (39" H)	74" W x 48" D	74" W x 42" D	84" W x 48" D	84" W x 42" D	
CratedDimensions, Remote (39" H)	56" W x 48" D	56" W x 42" D	66" W x 48" D	66" W x 42" D	

^{*90°}F ambient, -15°F evaporator, 20′ max. line length.

 $\label{lem:decomposition} \mbox{Data is for standard models: options may change specifications.}$

UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605 Telephone: (818) 764-6200 • Fax: (818) 764-6211 www.utilityrefrigerator.com













UR-CHF2 | MU



WARNING - This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is [are] known to the State of California to cause cancer and birth defects or other reproductive harm. For more inf

©/™/® Utility Refrigerator