



Project \_\_\_\_\_  
Item No. \_\_\_\_\_  
Model No. \_\_\_\_\_  
Quantity \_\_\_\_\_

CSI No. 114000

# REACH-IN HOT FOOD CABINET - ONE SECTION



HC-30-SS-2S-D  
30" Wide, Stainless Steel Exterior and Interior, half height doors (shown with optional 12" high top-mount)

## MODEL GUIDE

| Model Number                           | Description                         |
|--|-------------------------------------|
| <input type="checkbox"/> HC-25-SS-1S-D | 25" Wide, S/S Exterior and Interior |
| <input type="checkbox"/> HC-30-SS-1S-D | 30" Wide, S/S Exterior and Interior |
| Options                                | Model Number Modification           |
| <input type="checkbox"/> Half Doors    | Change "1S" to "2S"                 |
| <input type="checkbox"/> Pass-Thru     | Add prefix "PT" to model number     |
| <input type="checkbox"/> Narrow Depth  | Change suffix "D" to "N"            |
| <input type="checkbox"/> Glass Door    | Change "S" to "G"                   |

## AGENCY APPROVALS:



Intertek



Intertek

## STANDARD FEATURES:

### Construction/Cabinet

- Cabinet specially designed for holding hot food (not a modified refrigerator)
- 100% hi-temp fiberglass insulation for safety, durability and longevity
- Heat resistant, non-conductive phenolic thermal breaker
- Exterior sides – heavy gauge stainless steel
- Exterior back and bottom – heavy gauge galvanized
- Stainless steel top-mount housing
- Stainless steel front, door, rails and top-mount
- Heavy-duty 6" adjustable stainless steel legs
- Fully coved interior with welded radius corners for easy cleaning
- Stainless steel shelf clips and shelf standards
- Four adjustable chrome plated wire shelves per section
- 5" high low-profile top-mount

### Doors

- Self-closing door hinges with stay-open feature at 120°
- Standard right hinged door (other configurations available)
- Full-length, one-piece recessed Unigrip™ door handle (solid door models)
- Heavy-duty, built-in security cylinder door lock (solid door models)

### Heating System

- Easy to set, top-mounted digital control
- Temperature setpoint memory (keeps setting when power is off)
- Main power switch
- Humidity controlling vent in top of cabinet

### Control Systems & Warranty Coverage


- Digital temperature control – easily adjust setpoint between 165-175°F
- Master power switch
- One 9ft electrical cord (115V models only)
- Warranty: 5 year parts, 1 year labor

## OPTIONS & ACCESSORIES:

- ☐ Stainless steel back \_\_\_ top\_\_\_ bottom\_\_\_ (specify all that apply)
- ☐ Additional chrome wire shelves (specify quantity) \_\_\_\_\_
- ☐ Stainless steel wire shelves in lieu of chrome shelves
- ☐ Tray slides (specify quantity) \_\_\_\_\_  
"L" Type \_\_\_ Universal slides \_\_\_ "R" Type \_\_\_
- ☐ Stainless steel curb base (specify 4" or 6" high)
- ☐ 6" front locking casters in lieu of legs (no charge)
- ☐ 4" front locking casters in lieu of legs
- ☐ 6" seismic legs
- ☐ Correctional facilities package
- ☐ 12" high top-mount
- ☐ One 9ft electrical cord & plug (NEMA L14-20P; 208/230V models)



# REACH-IN HOT FOOD CABINET - ONE SECTION

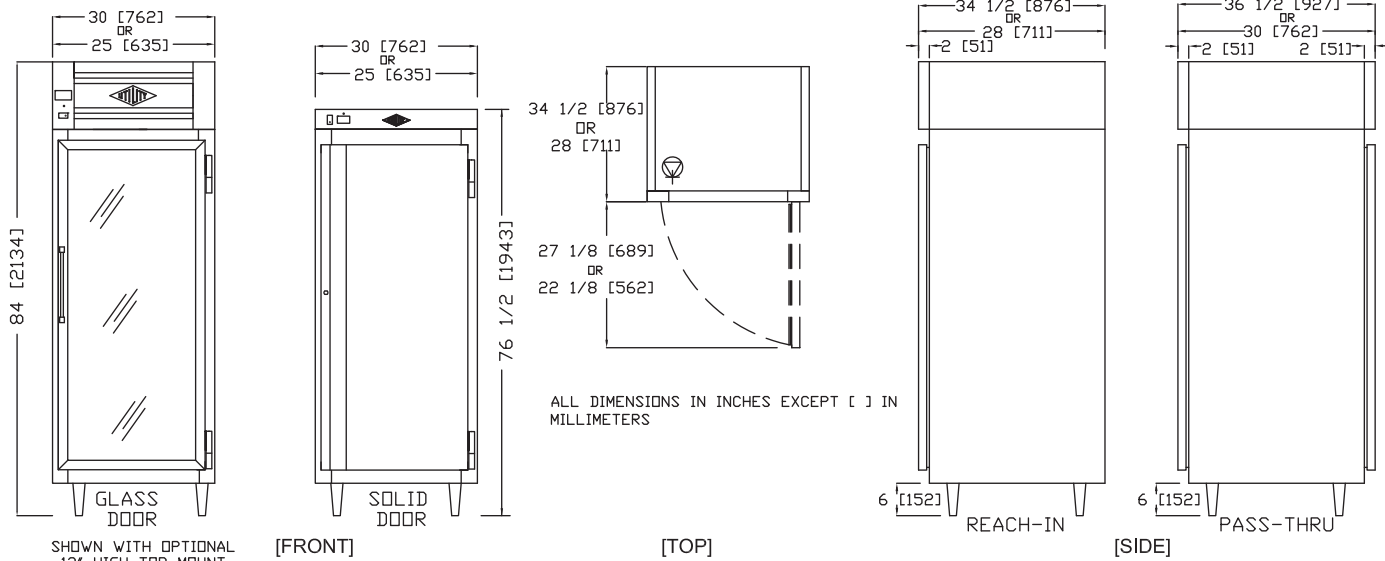

| PRODUCT DATA   | HC-25 Series<br>Standard Depth | HC-25 Series<br>Narrow Depth | HC-30 Series<br>Standard Depth | HC-30 Series<br>Narrow Depth |
|--|--------------------------------|------------------------------|--------------------------------|------------------------------|
| <b>KEY DIMENSIONS</b>                                  |                                |                              |                                |                              |
| Width (overall)  | 25.0"                          | 25.0"                        | 30.0"                          | 30.0"                        |
| Depth (overall)  | 34.5"                          | 28.0"                        | 34.5"                          | 28.0"                        |
| Depth Pass-Thru Models (overall)                       | 36.5"                          | 30.0"                        | 36.5"                          | 30.0"                        |
| Height, with low profile top mount (overall inc. legs) | 76.5"                          | 76.5"                        | 76.5"                          | 76.5"                        |
| Height, with full height top mount (overall inc. legs) | 84.0"                          | 84.0"                        | 84.0"                          | 84.0"                        |
| Door Opening (net width)                               | 18.25"                         | 18.25"                       | 23.25"                         | 23.25"                       |
| Door Opening (net height)                              | 57.25"                         | 57.25"                       | 57.25"                         | 57.25"                       |
| Half Door Opening (net ht.)                            | 26.75"                         | 26.75"                       | 26.75"                         | 26.75"                       |
| <b>CAPACITY</b>  |                                |                              |                                |                              |
| Capacity (cu.ft.)                                      | 19                             | 15                           | 24                             | 18                           |
| Number of Shelves                                      | 4                              | 4                            | 4                              | 4                            |
| Shelf Area (sq. ft., including bottom)                 | 16                             | 12                           | 20                             | 15                           |
| <b>ELECTRICAL</b>                                      |                                |                              |                                |                              |
| Voltage (dedicated circuit required)                   | 115 or 208/230                 | 115 or 208/230               | 115 or 208/230                 | 115 or 208/230               |
| Amperage (115V)  | 13.0                           | 13.0                         | 13.0                           | 13.0                         |
| Amperage (208/230V)                                    | 7.2 / 6.5                      | 7.2 / 6.5                    | 7.2 / 6.5                      | 7.2 / 6.5                    |
| NEMA Plug Configuration (115V only)*                   | 5-15 P                         | 5-15 P                       | 5-15 P                         | 5-15 P                       |
| Wattage  | 1500                           | 1500                         | 1500                           | 1500                         |
| <b>SHIPPING</b>  |                                |                              |                                |                              |
| Ship Weight (lbs.)                                     | 450                            | 360                          | 550                            | 445                          |
| Ship Volume, Standard Depth (cu.ft.)                   | 75                             | 66                           | 87                             | 76                           |
| Crated Dimensions (87" H)                              | 31"W x 48"D                    | 31"W x 42"D                  | 36"W x 48"D                    | 36"W x 42"D                  |

\*208/230V models hardwired

Data is for standard models: options may change specifications.

## UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605

Telephone: (818) 764-6200 • Fax: (818) 764-6211

[www.utilityrefrigerator.com](http://www.utilityrefrigerator.com)

DUE TO CONTINUOUS PRODUCT IMPROVEMENTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

©/™/® Utility Refrigerator



BIM | CAD | MOBILE



**WARNING** - This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is [are] known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

UR-HC1 | MU