



Project \_\_\_\_\_  
 Item No. \_\_\_\_\_  
 Model No. \_\_\_\_\_  
 Quantity \_\_\_\_\_

CSI No. 114000

# LOW HEIGHT EQUIPMENT STAND FREEZER - THREE SECTION



LHF-90-3D (remote)  
 90" Overall Width, Three Drawers  
 (shown with optional stainless steel  
 equipment top)



LHF-78-3D-EM  
 96" Overall Width, Three Drawers  
 (shown with optional stainless steel  
 flat top)

## MODEL GUIDE

Model Number	Description
<input type="checkbox"/> LHF-78-3D-EM	96" Wide, Three Drawers, 5 Pans Front-to-Back
<input type="checkbox"/> LHF-78T-3D-EM	96" Wide, Three Drawers, 5 Pans Front-to-Back, Tall Body
<input type="checkbox"/> LHF-90-3D-EM	108" Wide, Three Drawers, 6 Pans Front-to-Back
<input type="checkbox"/> LHF-90T-3D-EM	108" Wide, Three Drawers, 6 Pans Front-to-Back, Tall Body
<input type="checkbox"/> LHF-96-3D-EM	114" Wide, Three Drawers, 6 Pans FB/SBS
<input type="checkbox"/> LHF-96T-3D-EM	114" Wide, Three Drawers, 6 Pans FB/SBS, Tall Body
<input type="checkbox"/> LHF-102-3D-EM	120" Wide, Three Drawers, 6 Pans Side-by-Side
<input type="checkbox"/> LHF-102T-3D-EM	120" Wide, Three Drawers, 6 Pans Side-by-Side, Tall Body
Options	Model Number Modification
<input type="checkbox"/> Remote Refrigeration	Delete suffix "EM" from model number

## STANDARD FEATURES:

### Construction/Cabinet

- Exterior front and sides – heavy gauge stainless steel
- Exterior back and bottom – heavy gauge galvanized
- Stainless steel compressor housing
- Stainless steel front, drawer, rails and end-mount
- Heavy-duty 6" adjustable stainless steel legs
- Cabinet body is foamed-in-place minimum 2-1/2" thick polyurethane insulation
- Fully coved interior with welded radius corners for easy cleaning

### Drawers

- Drawers hold 12" x 20" pans or fractional pans (pans by others)
- "T" models hold 6" deep pans in all drawers (standard models hold 6" pans in top drawers only)
- Energy saving condensate heater around drawer opening
- Reinforced top to support heavy restaurant equipment
- Rugged drawer construction
- Welded stainless steel drawer pull
- Specially insulated top for efficient cooling when used with cooking equipment
- Low cabinet height places cooking equipment at ergonomically convenient level
- Snap-in magnetic drawer gasket
- Impact-resistant PVC breaker strip

### Refrigeration Package

- Slideout condensing unit - enables fast and easy service
- Expansion valve refrigeration system for superior recovery and temperature pulldown
- Low Pressure control – prevents compressor burnout in case of refrigerant loss
- R-449a, low GWP refrigerant for superior temperature recovery and pulldown
- Hot gas condensate evaporator quickly dissipates condensation using zero additional energy
- Receiver tank and service valves – allows reuse of refrigerant and enables rapid pulldown during times of peak demand
- Integrated sight glass – allows technicians to easily detect leaks or moisture without tools

### Control Systems & Warranty Coverage

- Digital temperature control – easily adjust setpoint between -5 to 5°F
- Master power switch
- One 9 foot electrical cord
- Warranty: 5 year compressor, 5 year parts, 1 year labor

## OPTIONS & ACCESSORIES:

- Stainless steel top (specify equipment or marine edge type)
- Stainless steel back \_\_\_ bottom\_\_\_ (specify either or both)
- Digital temperature control & solenoid for remote models
- Refrigerant options for remote models-please specify refrigerant type
- Stainless steel curb base (specify 4" or 6" high)
- Temperature alarm
- 6" front locking casters in lieu of legs (no charge)
- 4" front locking casters in lieu of legs
- 6" seismic legs
- 2 drawers per section (available on "T" models only; reduces pan depth to 4")
- Correctional facilities package
- Water-cooled condensing unit
- Door in lieu of drawers (specify hinging)

## AGENCY APPROVALS:




Intertek



Intertek



# LOW HEIGHT EQUIPMENT STAND FREEZER - THREE SECTION

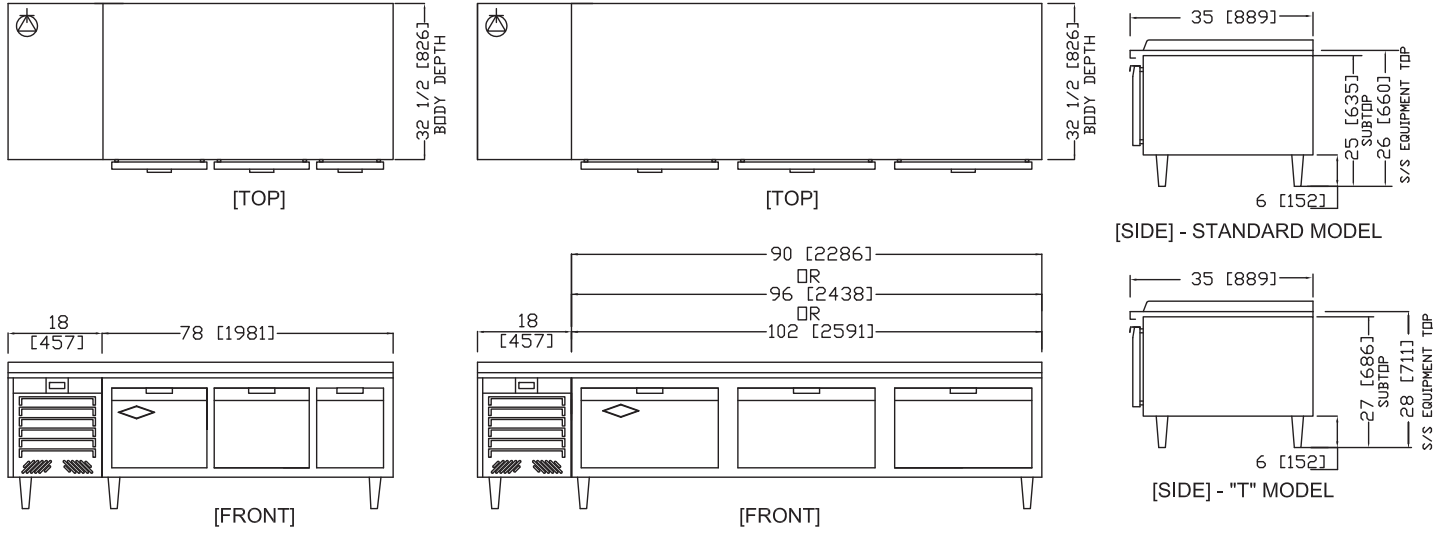

ALL DIMENSIONS IN INCHES EXCEPT [ ] IN MILLIMETERS

PRODUCT DATA	LHF-78	LHF-90	LHF-96	LHF-102
<b>KEY DIMENSIONS</b>				
Width, Self-Contained (overall)	96.0"	108.0"	114.0"	120.0"
Width, Remote (overall)	78.0"	90.0"	96.0"	102.0"
Depth (overall)	34.5"	34.5"	34.5"	34.5"
Height, Standard Model (overall inc. legs)	26.0"	26.0"	26.0"	26.0"
Height, "T" Model (overall inc. legs)	28.0"	28.0"	28.0"	28.0"
<b>CAPACITY</b>				
Pan Capacity, 12" x 20" Pans (by others)	5	6	6	6
<b>ELECTRICAL</b>				
Voltage (dedicated circuit required)	115	115	115	115
Amperage (self-contained)	7.6	7.7	8.8	8.8
Amperage (remote refrigeration)	7.5	7.6	9.6	9.6
BTU requirement*, remote	1836	2018	2407	2539
NEMA Plug Configuration (self-contained only)	5-15P	5-15P	5-15P	5-15P
Horsepower (self-contained)	1/3	1/3	1/2	1/2
<b>SHIPPING</b>				
Ship Weight, Self-Contained (lbs.)	730	795	870	915
Ship Weight, Remote (lbs.)	610	675	750	795
Ship Volume, Self-Contained (cu. ft.)	84	94	99	104
Ship Volume, Remote (cu.ft.)	69	79	84	89
Crated Dimensions, Self-Contained (32" H)	102" W x 42" D	114" W x 42" D	120" W x 42" D	126" W x 42" D
Crated Dimensions, Remote (32" H)	84" W x 42" D	96" W x 42" D	102" W x 42" D	108" W x 42" D

\*90°F ambient, -15°F evaporator, 20' max. line length

Data is for standard models: options may change specifications.

## UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605

Telephone: (818) 764-6200 • Fax: (818) 764-6211

[www.utilityrefrigerator.com](http://www.utilityrefrigerator.com)

*DUE TO CONTINUOUS PRODUCT IMPROVEMENTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.*

©/™/® Utility Refrigerator



WARNING - This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is [are] known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

UR-LHF3 | MU