



**UTILITY REFRIGERATOR**  
PEOPLE • PRODUCT • PERFORMANCE • PRIDE

Project \_\_\_\_\_  
Item No. \_\_\_\_\_  
Model No. \_\_\_\_\_  
Quantity \_\_\_\_\_

CSI No. 114000

# RAISED RAIL PIZZA PREP TABLES

## STANDARD FEATURES:

### Refrigerated Prep Rail

- Rugged construction - designed to perform in the most demanding environments
- Air cooled pan rail - eliminates the defrosting, ice buildup, and cleaning associated with cold wall systems
- Removable stainless steel pan frame - securely holds pans (by others) and can be removed for easy cleaning
- Removable stainless steel night cover - reduces warm air infiltration when rail is not in use; removable for easy pan access
- Engineered two zone cooling airflow - gentle flow of air over the top cools without drying food; faster airflow on bottom and sides enables pans to stay cold in high ambient conditions
- Minimal recessing of pans - keeps food cold while allowing easy access to ingredients

### Refrigeration Package

- Slideout condensing unit - enables fast and easy service
- Energy efficient, service friendly expansion valve refrigeration system for superior recovery and temperature pulldown
- Pressure control - prevents compressor burnout in case of refrigerant loss
- R-290 low GWP refrigerant for superior temperature recovery and pulldown
- Hot gas condensate evaporator
- Service ports allow easy access to refrigerant enabling safe, quick recharging as needed
- Integrated sight glass - allows technicians to easily detect leaks or moisture without tools

### Construction/Cabinet

- Exterior sides and top - heavy gauge stainless steel
- Exterior back and bottom - heavy gauge galvanized
- Stainless steel front, door, rails, end mount, and interior
- Heavy-duty 6" adjustable stainless steel legs
- Cabinet body is foamed-in-place polyurethane insulation
- Fully coved interior with welded radius corners for easy cleaning
- Optional drawers hold two 12"x 20" pans or fractional pans (pans by others)
- Welded stainless steel door handle or drawer pull
- Compressor housing located on left side (optional on right side)
- Heavy duty stainless steel shelf clips and shelf standards  
Shelves adjustable in 1 inch increments
- One chrome plated wire shelf per section

### Doors

- Self-closing door hinges with stay-open feature at 120°
- Energy saving condensate heater around door opening
- Snap-in magnetic door gasket
- Impact-resistant PVC breaker strip

### Control Systems & Warranty Coverage

- Digital temperature control - easily adjust setpoint between 35-40°F
- Master power switch
- One 9 foot electrical cord
- Warranty: 5 year compressor, 5 year parts, 1 year labor

### OPTIONS & ACCESSORIES:

- Stainless steel back \_\_\_ and/or bottom \_\_\_ (specify either or both)
- Additional chrome wire shelves (specify quantity) \_\_\_\_\_
- Poly cutting board
- 6" front locking casters in lieu of legs (no charge)
- 2 or 3 drawers in lieu of door (std depth only; 60", 90" models only)
- Interior LED lighting
- Compressor on right side



PPR-60-2S-D-EM  
78" overall width, 2 doors,  
self-contained

## MODEL GUIDE

Model Number	Description
<input type="checkbox"/> PPR-30-1S-EM	48" Overall Width, One Doors
<input type="checkbox"/> PPR-50-2S-EM	68" Overall Width, Two Doors
<input type="checkbox"/> PPR-60-2S-EM	78" Overall Width, Two Doors
Options	Model Number Modification
<input type="checkbox"/> Remote Refrigeration	Delete suffix "EM" from model number


## AGENCY APPROVALS:





UTILITY REFRIGERATOR  
PEOPLE • PRODUCT • PERFORMANCE • PRIDE

# RAISED RAIL PIZZA PREP TABLES

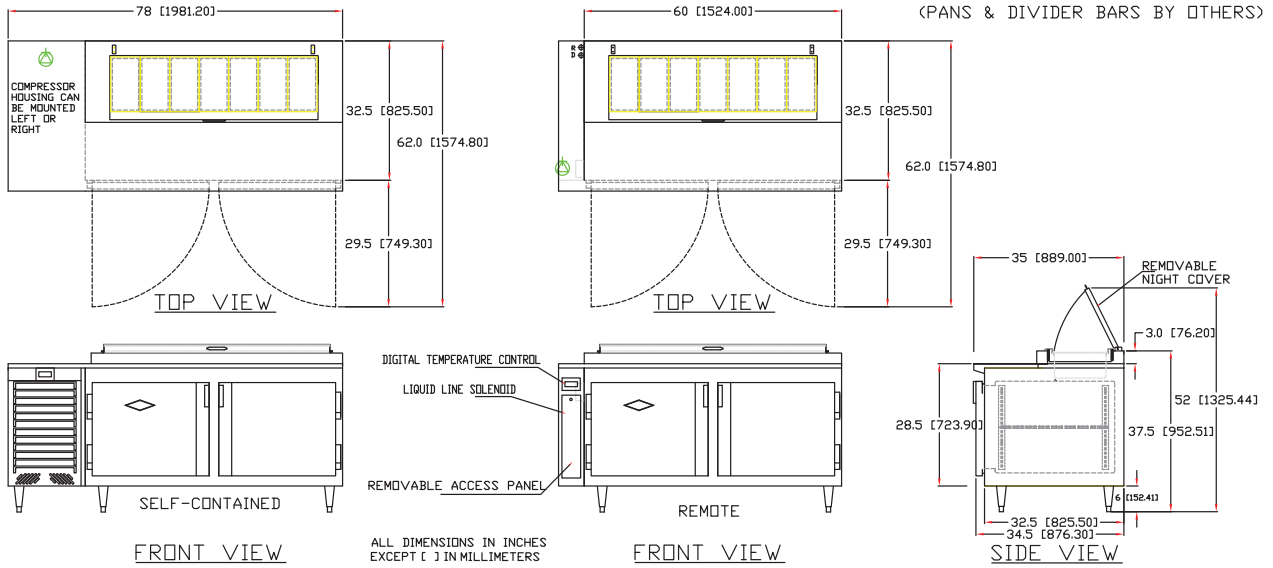

PRODUCT DATA	PPR-30	PPR-50	PPR-60
<b>KEY DIMENSIONS</b>			
Width, Self-Contained (overall)	48.0"	68.0"	78.0"
Width, Remote (overall)	36.0"	56.0"	66.0"
Depth (overall)	34.5"	34.5"	34.5"
Height (incl. 6" legs or casters)	34.5"	34.5"	34.5"
<b>CAPACITY</b>			
Capacity (cu.ft.)	9	16	19
Number of Pans	3 pans	6 pans	7 pans
<b>ELECTRICAL</b>			
Voltage (dedicated circuit required)	115	115	115
Amperage (self-contained)	6.3	6.8	7.0
Amperage (remote refrigeration)	3.9	4.4	4.6
BTU requirement*, remote	1403	1845	1971
NEMA Plug Configuration (self-contained only)	5-15P	5-15P	5-15P
Horsepower (self-contained)	1/3	1/3	1/3
<b>SHIPPING</b>			
Ship Weight, Self-Contained (lbs.)	430	550	610
Ship Weight, Remote (lbs.)	300	320	400
Ship Volume, Self-Contained (cu.ft.)	72	85	99
Ship Volume, Remote (cu.ft.)	56	76	80
Crated Dimensions, Self-Contained (48" H)	54" W x 48" D	74" W x 48" D	84" W x 48" D
Crated Dimensions, Remote (48" H)	42" W x 48" D	62" W x 48" D	72" W x 48" D

\*90°F ambient, 20°F evaporator, 20' max. line length.

Data is for standard models: options may change specifications.

## UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605

Telephone: (818) 764-6200 • Fax: (818) 764-6211

[www.utilityrefrigerator.com](http://www.utilityrefrigerator.com)

*DUE TO CONTINUOUS PRODUCT IMPROVEMENTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.*

©/™/® Utility Refrigerator

Plug Configuration



NEMA 5-15P

SMART  
290™



WARNING - This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is [are] known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

UR-001 | BAA