

roject	
tem No.	
Nodel No.	
Quantity .	

CSI No. 114000

ROLL-IN HOT FOOD CABINET "H" SERIES - FOR 72" HIGH CARTS



RIHC-30-SS-1S-H 30"Wide, Stainless Steel (shown with optional 12"high top-mount)

MODEL GUIDE

Model Number		Description			
	RIHC-30-SS-1S-H	30" Wide, One Narrow Door, S/S Exterior and Interior			
	RIHC-375-SS-1S-H	37.5"Wide, One Door Extra Wide, S/S Exterior and Interior			
	RIHC-60-SS-2S-H	60" Wide, Two Narrow Doors, S/S Exterior and Interior			
	RIHC-68-SS-2S-H	68" Wide, Two Doors, S/S Exterior and Interior			
	RIHC-75-SS-2S-H	75"Wide, Two Doors Extra Wide, S/S Exterior and Interior			
	RIHC-90-SS-3S-H	90"Wide, Three Narrow Doors, S/S Exterior and Interior			
	RIHC-100-SS-3S-H	100"Wide, Three Doors Extra Wide, S/S Exterior and Interior			
Options Model Number Modification					
	Roll-Thru	Change "RI" to "RT"			
	Glass Door	Change "S" to "G"			

AGENCY APPROVALS:





STANDARD FEATURES:

Construction/Cabinet

- Independent compartments and heating systems for each section allow multiple holding temperatures, prevent intermixing of food, flavors, or odors, and save energy (two and three section models only)
- Cabinet specially designed for holding hot food (not a modified refrigerator)
- 100% hi-temp fiberglass insulation for safety, durability and longevity
- · Heat resistant, non-conductive phenolic thermal breaker
- Exterior front and sides heavy gauge stainless steel
- Exterior back and bottom heavy gauge galvanized
- · Stainless steel top-mount housing
- Stainless steel front, door, and grille
- Heavy-duty removable stainless steel cart ramp
- Fully coved interior with welded radius corners for easy cleaning
- 5" high low-profile top-mount

Doors

- Self-closing, lift off door hinges with stay-open feature at 120°
- Standard right hinged door (other configurations available)
- Full-length, one-piece recessed Unigrip[™] door handle (solid door models)
- · Heavy-duty, built-in security cylinder door lock (solid door models)

Heating System

- Easy to set, top-mounted digital control
- Temperature setpoint memory (keeps setting when power is off)
- · Main power switch
- · Humidity controlling vent in top of cabinet

Control Systems & Warranty Coverage

- Digital temperature control easily adjust setpoint between 165-175°F
- · Master power switch
- One 9ft electrical cord (115V models only)
- Warranty: 5 year compressor, 5 year parts, 1 year labor


OPTIONS & ACCESSORIES:

Correctional facilities package
12" high top-mount
Glass doors
Double-deep configuration
Shelving options
Reach-in half doors on rear side of roll-thru model
One 9ft electrical cord & plug (NEMA L14-20P)

☐ Stainless steel back ___ top___ bottom___ (specify all that apply)



ROLL-IN HOT FOOD CABINET "H" SERIES - FOR 72" HIGH CARTS

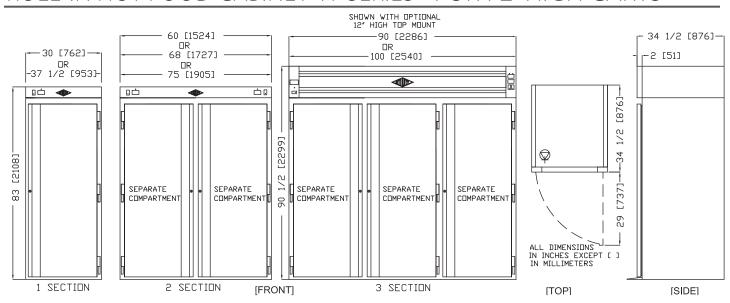

PRODUCT DATA	RIHC-30	RIHC-375	RIHC-60	RIHC-68	RIHC-75	RIHC-90	RIHC-100	
	KEY DIMENSIONS							
Width (overall)	30.0"	37.5"	60.0"	68.0"	75.0"	90.0"	100.0"	
Depth (overall)	34.5"	34.5"	34.5"	34.5"	34.5"	34.5"	34.5"	
Depth Roll-Thru Models (overall)	36.5"	36.5"	36.5"	36.5"	36.5"	36.5"	36.5"	
Height, with low profile top mount (overall)	83.0"	83.0"	83.0"	83.0"	83.0"	83.0"	83.0"	
Height, with full height top mount (overall)	90.5"	90.5"	90.5"	90.5"	90.5"	90.5"	90.5"	
Maximum Cart Height	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	72.0"	
Maximum Cart Width	23.0"	30.5"	23.0"	27.0"	30.5"	23.0"	27.0"	
Maximum Cart Depth	29.0"	29.0"	29.0"	29.0"	29.0"	29.0"	29.0"	
	CAPACITY							
Capacity (cu.ft.)	28	36	55	64	72	83	94	
	ELECTRICAL							
Voltage (dedicated circuit required)	115 or 208/230	115 or 208/230	208/230	208/230	208/230	208/230	208/230	
Amperage, Roll-In/Roll-Thru Models (115V)	13.0 / 17.4	13.0 / 17.4	N/A	N/A	N/A	N/A	N/A	
Amperage, Roll-In/Roll-Thru Models (208/230V)	7.2 / 9.6	7.2 / 9.6	14.4 / 19.2	14.4 / 19.2	14.4 / 19.2	21.6 / 28.8	21.6 / 28.8	
NEMA Plug Configuration, Roll-In/Roll-Thru Models*	5-20P	5-20P	NO CORD/PLUG					
Wattage, Roll-In/Roll-Thru Models	1500 / 2000	1500 / 2000	3000 / 4000	3000 / 4000	3000 / 4000	4500 / 6000	4500 / 6000	
	SHIPPING							
Ship Weight (lbs.)	635	705	820	890	1050	1250	1400	
Ship Volume, Standard Depth (cu.ft.)	99	116	182	204	223	264	275	
Crated Dimensions (99" H)	36" W x 48" D	42" W x 48" D	66" W x 48" D	74" W x 48" D	81" W x 48" D	96" W x 48" D	106" W x 48" D	

^{*115}V models only; 208/230V models hardwired

Data is for standard models: options may change specifications.

UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605 Telephone: (818) 764-6200 • Fax: (818) 764-6211 www.utilityrefrigerator.com













WARNING - This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is [are] known to the State of California to cause cancer and birth defects or other reproductive harm. For more inf