



Project _____
Item No. _____
Model No. _____
Quantity _____

CSI No. 114000

ROLL-IN HOT FOOD CABINET "L" SERIES - FOR 66" HIGH CARTS



RIHC-30-SS-1S-L
30" Wide, Stainless Steel (shown
with optional 12" high top-mount)

MODEL GUIDE

Model Number	Description
<input type="checkbox"/> RIHC-30-SS-1S-L	30" Wide, One Narrow Door, S/S Exterior and Interior
<input type="checkbox"/> RIHC-37.5-SS-1S-L	37.5" Wide, One Door Extra Wide, S/S Exterior and Interior
<input type="checkbox"/> RIHC-60-SS-2S-L	60" Wide, Two Narrow Doors, S/S Exterior and Interior
<input type="checkbox"/> RIHC-68-SS-2S-L	68" Wide, Two Doors, S/S Exterior and Interior
<input type="checkbox"/> RIHC-75-SS-2S-L	75" Wide, Two Doors Extra Wide, S/S Exterior and Interior
<input type="checkbox"/> RIHC-90-SS-3S-L	90" Wide, Three Narrow Doors, S/S Exterior and Interior
<input type="checkbox"/> RIHC-100-SS-3S-L	100" Wide, Three Doors Extra Wide, S/S Exterior and Interior
Options	Model Number Modification
<input type="checkbox"/> Roll-Thru	Change "RI" to "RT"
<input type="checkbox"/> Glass Door	Change "S" to "G"

AGENCY APPROVALS:



Intertek



Intertek

STANDARD FEATURES:

Construction/Cabinet

- Independent compartments and heating systems for each section allow multiple holding temperatures, prevent intermixing of food, flavors, or odors, and save energy (two and three section models only)
- Cabinet specially designed for holding hot food (not a modified refrigerator)
- 100% hi-temp fiberglass insulation for safety, durability and longevity
- Heat resistant, non-conductive phenolic thermal breaker
- Exterior front and sides – heavy gauge stainless steel
- Exterior back and bottom – heavy gauge galvanized
- Stainless steel top-mount housing
- Stainless steel front, door, and grille
- Heavy-duty removable stainless steel cart ramp
- Fully coved interior with welded radius corners for easy cleaning
- 5" high low-profile top-mount

Doors

- Self-closing, lift off door hinges with stay-open feature at 120°
- Standard right hinged door (other configurations available)
- Full-length, one-piece recessed Unigrip™ door handle (solid door models)
- Heavy-duty, built-in security cylinder door lock (solid door models)

Heating System

- Easy to set, top-mounted digital control
- Temperature setpoint memory (keeps setting when power is off)
- Main power switch
- Humidity controlling vent in top of cabinet

Control Systems & Warranty Coverage


- Digital temperature control – easily adjust setpoint between 165-175°F
- Master power switch
- One 9ft electrical cord (115V models only)
- Warranty: 5 year compressor, 5 year parts, 1 year labor

OPTIONS & ACCESSORIES:

- ☐ Stainless steel back ___ top___ bottom___ (specify all that apply)
- ☐ Correctional facilities package
- ☐ 12" high top-mount
- ☐ Glass doors
- ☐ Double-deep configuration
- ☐ Shelving options
- ☐ Reach-in half doors on rear side of roll-thru model
- ☐ One 9ft electrical cord & plug (NEMA L14-20P)



ROLL-IN HOT CABINET "L" SERIES - FOR 66" HIGH CARTS

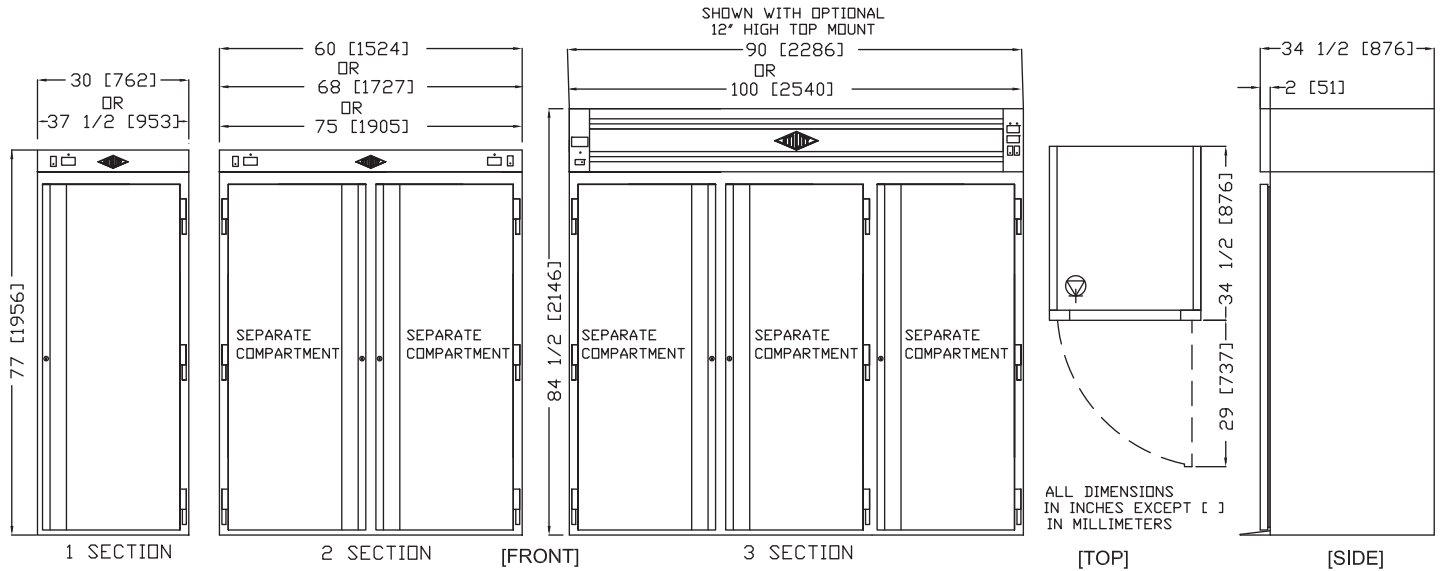

PRODUCT DATA	RIHC-30	RIHC-375	RIHC-60	RIHC-68	RIHC-75	RIHC-90	RIHC-100
KEY DIMENSIONS							
Width (overall)	30.0"	37.5"	60.0"	68.0"	75.0"	90.0"	100.0"
Depth (overall)	34.5"	34.5"	34.5"	34.5"	34.5"	34.5"	34.5"
Depth Roll-Thru Models (overall)	36.5"	36.5"	36.5"	36.5"	36.5"	36.5"	36.5"
Height, with low profile top mount (overall)	77.0"	77.0"	77.0"	77.0"	77.0"	77.0"	77.0"
Height, with full height top mount (overall)	84.5"	84.5"	84.5"	84.5"	84.5"	84.5"	84.5"
Maximum Cart Height	66.0"	66.0"	66.0"	66.0"	66.0"	66.0"	66.0"
Maximum Cart Width	23.0"	30.5"	23.0"	27.0"	30.5"	23.0"	27.0"
Maximum Cart Depth	29.0"	29.0"	29.0"	29.0"	29.0"	29.0"	29.0"
CAPACITY							
Capacity (cu.ft.)	25	33	50	59	66	76	86
ELECTRICAL							
Voltage (dedicated circuit required)	115 or 208/230	115 or 208/230	208/230	208/230	208/230	208/230	208/230
Amperage, Roll-In/Roll-Thru Models (115V)	13.0 / 17.4	13.0 / 17.4	N/A	N/A	N/A	N/A	N/A
Amperage, Roll-In/Roll-Thru Models (208/230V)	7.2 / 9.6	7.2 / 9.6	14.4 / 19.2	14.4 / 19.2	14.4 / 19.2	21.6 / 28.8	21.6 / 28.8
NEMA Plug Configuration, Roll-In/Roll-Thru Models*	5-20P	5-20P	NO CORD/PLUG	NO CORD/PLUG	NO CORD/PLUG	NO CORD/PLUG	NO CORD/PLUG
Wattage, Roll-In/Roll-Thru Models	1500 / 2000	1500 / 2000	3000 / 4000	3000 / 4000	3000 / 4000	4500 / 6000	4500 / 6000
SHIPPING							
Ship Weight (lbs.)	600	680	730	800	910	1100	1250
Ship Volume, Standard Depth (cu.ft.)	94	110	172	193	212	251	261
Crated Dimensions (99"H)	36" W x 48" D	42" W x 48" D	66" W x 48" D	74" W x 48" D	81" W x 48" D	96" W x 48" D	106" W x 48" D

*115V models only; 208/230V models hardwired

Data is for standard models: options may change specifications.

UTILITY REFRIGERATOR

12160 Sherman Way • North Hollywood, CA 91605

Telephone: (818) 764-6200 • Fax: (818) 764-6211

www.utilityrefrigerator.com

DUE TO CONTINUOUS PRODUCT IMPROVEMENTS, SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

©/™/® Utility Refrigerator



WARNING - This product can expose you to chemicals including Di(2-ethylhexyl)phthalate (DEHP), which is [are] known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov

UR-RIHCL | MU